


SOCIAL DISTANCING PROTECTION

Protect yourself and others with audible proximity monitors and alerts

- Highly effective vibrating or audible alerts
- Rechargeable wristbands
- Protect workers and customers
- Superb duty of care measures
- Keep workers apart, define area capacity limits or limit access to thoroughfares




Our versatile social distancing solutions allow you to protect yourself, workers and customers whilst ensuring compliance with UK government guidelines for work sites.

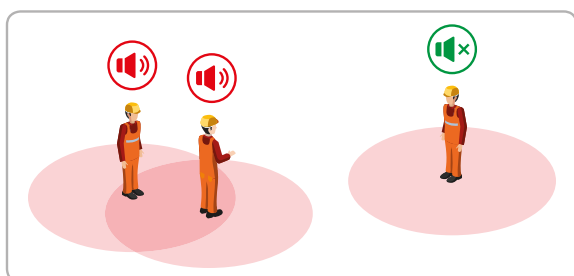


People Distancing

In order to comply with social distancing guidance, Personal Unit alerts by sound and vibration when others approach. The safety range setting is available up to 5 metres. The battery is sufficient to cover 8-10 hour shifts.

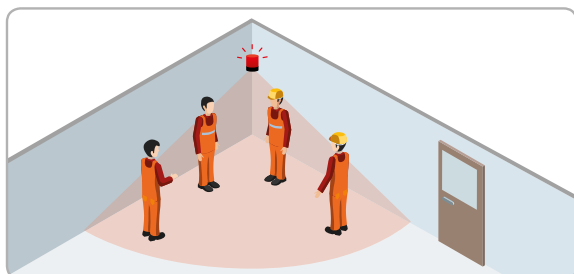

Area Distancing

Area Unit detects Personal Unit when entering the safety range. It alerts if the number of people exceeds the preset threshold (1 to 5) to avoid any gathering in the same space. The safety range setting is available up to 30 metres.

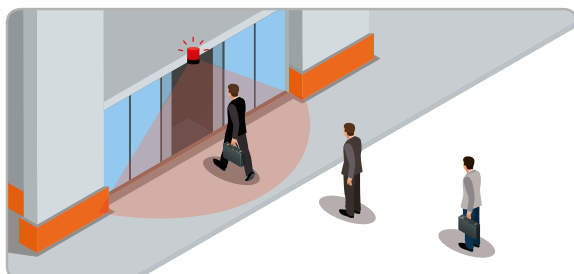

Access Control

Access Control is a must-have feature for warehouses and factories. Area Unit connected with the external output device will allow access control by detecting the personal unit. The gate will open only when a single person is located near the gate. This function helps people not assemble at the time of work site entry.

Call 01709 242505 to order today.



Personal Unit

- Detect other Personal Units based on UWB (Ultra Wideband) Technology
- Audible alert and vibration for close contact detection
- Rechargeable battery type with years of battery life
- Safety range setting up to 5 metres






Area Unit

- Detect Personal Units based on UWB (Ultra Wideband) Technology
- Audible alert and flashing LED for gathering in a certain area
- Safety range setting up to 30 metres
- Multiple audible alert options



External Output Device

- Use with Area Unit for additional controller attachment
- Additional controllers can be attached up to 3 pieces
- Output detection signal to controllers

Model	Personal Unit	Area Unit	External Output Device
			
Power	Battery powered (Li-Polymer 950mA)	110/220 VAC	12/24 VDC
Interface	-	CAN Bus 2.0	CAN Bus 2.0
Dimensions	40 x 72 x 19.5mm	122.7 x 140.6 x 111.5mm	131 x 95.6 x 38mm
Operation Temp.	-20 ~ 55°C	-30 ~ 85°C	-30 ~ 85°C
Operation Hour	Under 10h	Wired powered	Wired powered

Specifications can be changed for product improvement



Call 01709 242505 to order today or email us at info@endeavour-forklifts.co.uk.